


SOLID BUTTON HEAD RIVET

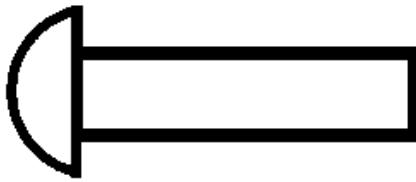

Nominal Size or Basic Shank Diameter		Shank Diameter		Head Diameter		Head Height	
		Max	Min	Max	Min	Max	Min
1/16	0.062	0.064	0.059	0.122	0.102	0.052	0.042
3/32	0.094	0.096	0.090	0.182	0.162	0.077	0.065
		0.127	0.121	0.235	0.215	0.100	0.088
5/32	0.156	0.158	0.152	0.290	0.268	0.124	0.110
3/16		0.191	0.182	0.348	0.322	0.147	0.133
7/32	0.219	0.222	0.213	0.405	0.379	0.172	0.158
1/4		0.253	0.244	0.460	0.430	0.196	0.180
9/32	0.281	0.285	0.273	0.518	0.484	0.220	0.202
5/16		0.316	0.304	0.572	0.538	0.243	0.225
11/32	0.344	0.348	0.336	0.630	0.592	0.267	0.247
			0.365	0.684	0.646	0.291	0.271
13/32	0.406	0.411	0.396	0.743	0.699	0.316	0.294
	0.438	0.443	0.428	0.798	0.754	0.339	0.317

Nominal Size or Basic Shank Diameter		Point Diameter	Point Length
		Approx.	Approx.
3/32	0.094	0.077	
1/8	0.125	0.102	0.031
5/32	0.156	0.127	0.039
3/16	0.188	0.154	0.047
7/32	0.219	0.179	0.055
1/4	0.250	0.204	0.062
9/32	0.281	0.2301	
5/16	0.312	0.255	0.078
11/32		0.281	
3/8	0.375	0.307	0.094