


T-NUTS STRAIGHT BARREL

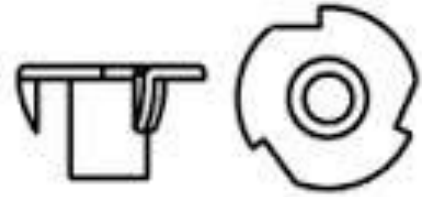

Part Number	Thread Size	H	G	F	A	T	Drill Size	Part #	Thread Size	H	G	F	A	T	Drill Size
		Barrel Height (± 1/32)	Flange Diam. (± 1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)				Barrel Height (± 1/32)	Flange Diam. (± 1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)	
0604 NT3	6-32	1/4	1/2	.188	1/8	.035	13/64	1407 NT4	1/4-20	7/16	3/4	.305	1/4	.047	5/16
0804 NT3	8-32	1/4	23/32	.208	7/32	.030	7/32	1408 NT3	1/4-20	9/16	3/4	.305	7/32 3/8	.047	5/16
1005NT3	10-24	5/16	3/4	.243	7/32	.040	1/4	1409 NT4	1/4-20	9/16	3/4	.305	1/4	.047	5/16
1005NT4	10-24	5/16	3/4	.243	7/32	.040	1/4	3105 NT3	5/16-18	5/16	7/8	.360	9/32	.047	3/8
1007 NT3	10-24	7/16	3/4	.243	5/16	.040	1/4	3105 NT4	5/16-18	5/16	7/8	.360	9/32	.047	3/8
1105 NT3	10-32	5/16	3/4	.243	7/32	.040	1/4	3106 NT3	5/16-18	3/8	7/8	.390	1/4	.063	25/64
1105NT4	10-32	5/16	3/4	.243	7/32	.040	1/4	3106 NT4	5/16-18	3/8	7/8	.390	1/4	.063	25/64
1107NT3	10-32	7/16	3/4	.243	5/16	.040	1/4	3107 NT3	5/16-18	7/16	7/8	.390	1/4	.063	13/32
1404NT3	1/4-20	1/4	3/4	.305	3/16	.047	5/16	3110 NT3	5/16-18	5/8	7/8	.390	5/16	.063	25/64
1405NT3	1/4-20	5/16	3/4	.305	7/32	.047	5/16	3110 NT4	5/16-18	5/8	7/8	.375 - .390	1/4- 5/16 3/8	.060 .063	25/64
1405NT4	1/4-20	5/16	3/4	.305	7/32	.047	5/16	3705 NT3	3/8-16	5/16	1	.420	9/32	.063	27/64
1406 NT3	1/4-20	3/8	3/4	.305	1/4	.047	5/16	3707 NT3	3/8-16	7/16	1	.440	11/32	.063	29/64
1407NT3	1/4-20	7/16	3/4	.305	5/16	.047	5/16	3707 NT4	3/8-16	7/16	1	.440	11/32	.063	29/64

Description	Internally threaded barrel-shaped fasteners integrally formed with a flat base, which has prong-type projections extending perpendicular from the base aside the barrel.
Applications/ Advantages	3-Prong: Used for fastening metal to products made of wood, particle board or plastic. The 3-prong style is used in harder materials to minimize splitting of the mating surface. 4-Prong: Four prong tee-nuts can be used in hard or soft woods.
Material	C1004-10 low-carbon steel.
Plating	See Appendix-A for plating information.